

University of Denver

Digital Commons @ DU

Fuel Efficiency Automobile Test Publications

Fuel Efficiency Automobile Test Data Repository

2004

On-Road Motor Vehicle Emissions from Around the World

Donald H. Stedman

Gary A. Bishop

Follow this and additional works at: https://digitalcommons.du.edu/feat_publications



Part of the **Environmental Chemistry Commons**

ON-ROAD MOTOR VEHICLE EMISSIONS FROM AROUND THE WORLD

Donald H. Stedman and Gary A. Bishop

Department of Chemistry and Biochemistry, University of Denver, Denver, CO, 80208
dstedman@du.edu, gbishop@du.edu

ABSTRACT

In 1993, on-road emissions in Continental Europe showed a pronounced South/North declining gradient for CO, HC and NO fuel specific emissions (gm/kg). Emissions in Hamburg and Rotterdam were comparable to emissions measured in 1993 in the U.S.A. with the same on-road instrument. Contrasts between emissions in the USA, the UK and Sweden demonstrated the importance both of modern catalysts and of good maintenance. The same contrast in 1998 shows the same picture but lower emissions at all three locations. In the decade from 1993-2003, U.S. emissions have declined markedly, apparently mainly as a result of lower emitting, better maintained, new vehicles. Results from Asia and South America will also be presented together with an analysis which suggests a correlation between average on-road vehicle emissions and the inverse of reported per-capita income. This latter relationship holds only up to a point. Beyond that point of increasing poverty, measured on-road emissions reach a plateau. Results from Mexico City in 1991 and 1994 show a dramatic decline in emissions, mainly caused by the imposition of modern control measures to the taxi cabs which, while only a small fraction of the registered fleet, contribute a large fraction of the vehicle miles traveled. Further improvement in Mexico City on-road emissions was observed by studies in 2000 [1] and 2003 [2].

INTRODUCTION

On-road emissions measurements have demonstrated skewed distributions in which relatively few vehicles are responsible for most of the pollution [3], and analysis has shown that identification and repair of these few vehicles is potentially more cost-effective than altering fuel chemistry, or scrapping vehicles just because they are older model years [4]. Further analysis given in this paper demonstrates that new vehicle emission standards which have been very successful in the past have reached a level of diminishing returns combined with escalating costs.

The remote sensor used in these studies was developed at the University of Denver for measuring the pollutants in motor vehicle exhaust, and has previously been described in the literature [5,6]. The instrument consists of a non-dispersive infrared (IR) component for detecting carbon monoxide, carbon dioxide (CO₂), and hydrocarbons, and a dispersive ultraviolet (UV) spectrometer for measuring nitric oxide. The source and detector units are positioned on opposite sides of the road in a bi-static arrangement. Collinear beams of IR and UV light are passed across the roadway into the IR detection unit, and are then focused onto a dichroic beam splitter, which serves to separate the beams into their IR and UV components. The IR light is then passed onto a spinning polygon mirror, which spreads the light across the four infrared detectors: CO, CO₂, HC and reference.

The UV light is reflected off the surface of the beam splitter and is focused into the end of a quartz fiber-optic cable, which transmits the light to a UV spectrometer. The UV unit is then capable of quantifying nitric oxide by measuring an absorbance band at 226.5 nm and comparing it to a calibration spectrum in the same region.

The exhaust plume path length and density of the observed plume are highly variable from vehicle to vehicle, and are dependent upon, among other things, the height of the vehicle's exhaust pipe, wind, and turbulence behind the vehicle. For these reasons, the remote sensor only directly measures ratios of CO, HC or NO to CO₂. The ratios of CO, HC, or NO to CO₂, termed Q, Q' and Q'' respectively, are constant for a given exhaust plume, and on their own are useful parameters for describing a hydrocarbon combustion system. The studies report measured emissions as %CO, %HC and %NO in the exhaust gas, corrected for water and excess oxygen not used in combustion. These are the data format found on the web site www.feat.biochem.du.edu. We recommend that users of the databases calculate the ratios of the reported data to CO₂ before further analysis. The %HC measurement is a factor of two smaller than an equivalent measurement by an FID instrument [7]. Thus, in order to calculate mass emissions as described below, the %HC values must first be multiplied by 2.0, assuming that the fuel used is regular gasoline. These percent emissions can be directly converted into mass emissions by the equations shown below.

$$\begin{aligned} \text{gm CO/gallon} &= 5506 \cdot \% \text{CO} / (15 + 0.285 \cdot \% \text{CO} + 2(2.87 \cdot \% \text{HC})) \\ \text{gm HC/gallon} &= 2(8644 \cdot \% \text{HC}) / (15 + 0.285 \cdot \% \text{CO} + 2(2.87 \cdot \% \text{HC})) \\ \text{gm NO/gallon} &= 5900 \cdot \% \text{NO} / (15 + 0.285 \cdot \% \text{CO} + 2(2.87 \cdot \% \text{HC})) \end{aligned}$$

These equations indicate that the relationship between concentrations of emissions to mass of emissions is quite linear, especially for CO and NO and at low concentrations for HC. Thus, the percent difference in emissions calculated from the concentrations of pollutants reported here is equivalent to a difference calculated from masses.

Another useful conversion is from percent emissions to grams pollutant per kilogram (g/kg) of fuel. This conversion is achieved directly by first converting the pollutant ratio readings to the moles of pollutant per mole of carbon in the exhaust from the following equation:

$$\frac{\text{moles pollutant}}{\text{moles C}} = \frac{\text{pollutant}}{\text{CO} + \text{CO}_2 + 3\text{HC}} = \frac{(\text{pollutant}/\text{CO}_2)}{(\text{CO}/\text{CO}_2) + 1 + 3(\text{HC}/\text{CO}_2)} = \frac{(Q, 2Q', Q'')}{Q + 1 + 6Q'}$$

Next, moles of pollutant are converted to grams by multiplying by molecular weight (e.g., 44 g/mole for HC since propane is measured), and the moles of carbon in the exhaust are converted to kilograms by multiplying (the denominator) by 0.014 kg of fuel per mole of carbon in fuel, assuming gasoline is stoichiometrically CH₂. Again, the HC/CO₂ ratio must use two times the reported HC (as above) because the equation depends upon carbon mass balance and the NDIR HC reading is about half a total carbon FID reading [7].

Quality assurance calibrations are performed twice daily in the field unless observed voltage readings or meteorological changes are judged to warrant more frequent calibrations. A puff

of gas containing certified amounts of CO, CO₂, propane and NO is released into the instrument's path, and the measured ratios from the instrument are then compared to those certified by the cylinder manufacturer (Praxair). These calibrations account for day-to-day variations in instrument sensitivity and variations in ambient CO₂ levels caused by local sources, atmospheric pressure and instrument path length. Since propane is used to calibrate the instrument, all hydrocarbon measurements reported by the remote sensor are as propane equivalents.

Studies sponsored by the California Air Resources Board and General Motors Research Laboratories have shown that the remote sensor is capable of CO measurements that are correct to within ±5% of the values reported by an on-board gas analyzer, and within ±15% for HC [8,9]. The NO channel used in this study has been extensively tested by the University of Denver. Tests involving a late-model low-emitting vehicle indicate a detection limit (3σ) of 25 ppm for exhaust NO, with an uncertainty of ±5% of the reading at higher concentrations.

The remote sensor is accompanied by a video system to record a freeze-frame image of the license plate of each vehicle measured. The emissions information for the vehicle, as well as a time and date stamp, is also recorded on the video image. The images are stored on videotape, so that license plate information may be incorporated into the emissions database during post-processing. A device to measure the speed and acceleration of vehicles driving past the remote sensor was also used in these studies. The system consists of a pair of infrared emitters and detectors (Banner Industries) which generate a pair of infrared beams passing across the road, six feet apart and approximately two feet above the surface. Vehicle speed is calculated from the time that passes between the front of the vehicle blocking the first and the second beam. To measure vehicle acceleration, a second speed is determined from the time that passes between the rear of the vehicle unblocking the first and the second beam. From these two speeds, and the time difference between the two, the acceleration is calculated.

An equation for determining the instantaneous power of an on-road vehicle has been proposed by Jimenez [10], which takes the form

$$\text{VSP} = 4.39 \cdot \sin(\text{slope}) \cdot v + 0.22 \cdot v \cdot a + 0.0954 \cdot v + 0.0000272 \cdot v^3$$

where VSP is the vehicle specific power in kW/metric tonne, *slope* is the slope of the roadway (in degrees), *v* is vehicle speed in mph, and *a* is vehicle acceleration in mph/s. Derived from dynamometer studies, and necessarily an approximation, the first term represents the work required to climb the gradient, the second term is the $f = ma$ work to accelerate the vehicle, the third is an estimated friction term, and the fourth term represents aerodynamic resistance. Using this equation, vehicle specific power is calculated for all measurements in the databases. This equation, in common with all dynamometer studies, does not include any load effects arising from road curvature.

In reports to CRC (see web site www.feat.biochem.du.edu) vehicle emissions data are compared by selecting data in various VSP bins, or are corrected by using emissions per VSP bin from each measurement year and the numbers per VSP bin from a reference year.

RESULTS AND DISCUSSION

Figure 1 shows data obtained in 1992. There are several notable features. The newest vehicles in Sweden have lower emission than the newest vehicles in Los Angeles. The “cliff” in the 1988/89 period when modern emission controls were introduced is also very apparent in the Swedish data [11,12]. The low emitting new vehicles in Sweden could arise because they are built lower emitting or it could arise from a better maintenance, or a combination of both. One can see that maintenance is important from these data because the US vehicles with MY from 1975 to 1980 were originally built with catalysts while the Swedish vehicle were not, but have been maintained for 12-17 yrs by Swedes. After this passage of time it appears that good maintenance predominates over emission control technology. Measurements in 1994 from other regions of Europe indicated that The Netherlands and Germany had emissions comparable to Sweden while France, Italy and Portugal showed increases with the UK comparable to Portugal (see Table 2). Apparently the UK suffered from a combination of poor technology and poor maintenance. The UK did begin modern emission controls in the 1992 MY.

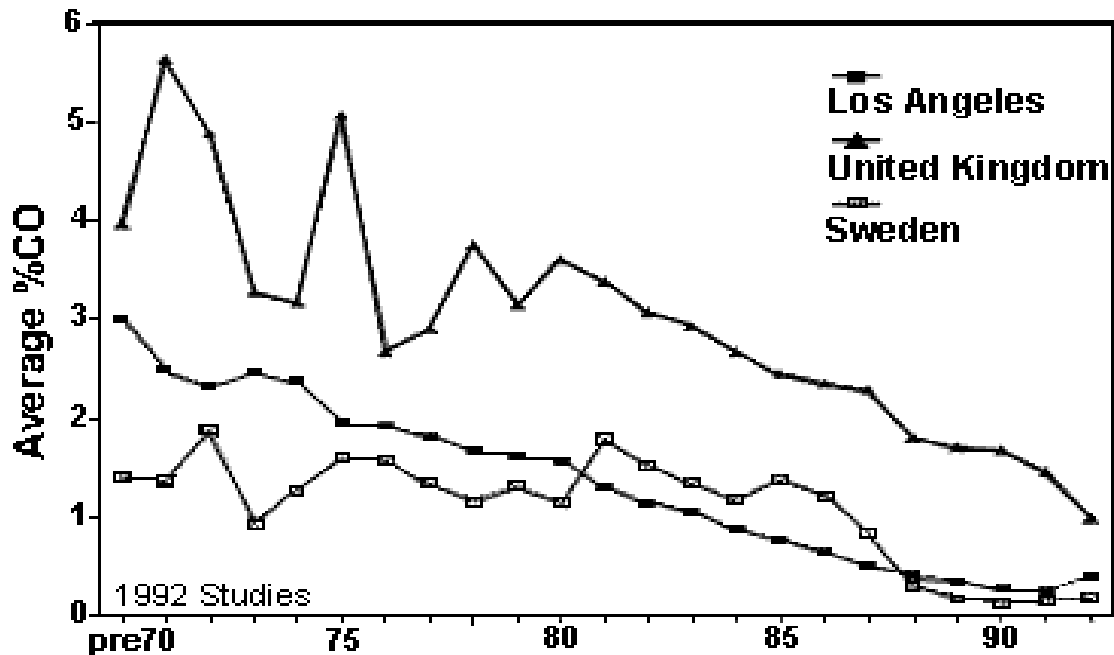


Figure 1. On-road percent CO emissions measurements collected in Los Angeles, Sweden and the United Kingdom in 1992.

Figure 2 shows the same comparison but with measurements carried out in 1998-1999 [13, 14, 15]. As before, the newest Swedish vehicles have uniformly lower emissions than the USA and the UK lags. We do not have UK data, but the US/Sweden comparison can be continued to 2001 data [15, 16]. Again, the Swedish measurements show emissions lower than the US across all of the post 1990 MY.

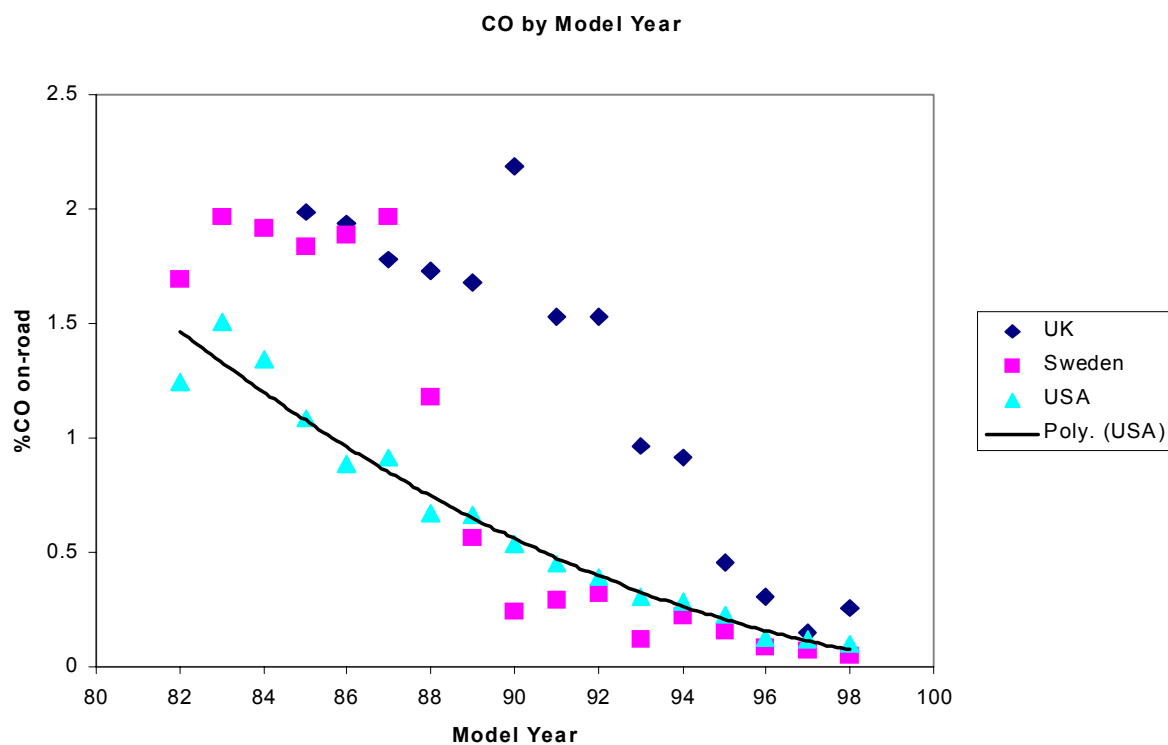


Figure 2. An updated version of Figure 1 with mean percent CO emissions plotted against model year for data from Sweden, United Kingdom and the United States. The USA data were collected in Denver, CO.

On-road emissions measured by means of remote sensing can be directly converted to emissions per gal or per kg of fuel as discussed. With the aid of fuel sales, often available from tax statistics, a fuel-based motor vehicle emissions inventory can be determined [16,17]. Bradley et al [18] compared emission measurements from several locations worldwide with a measure of poverty, the inverse of GDP per capita. She proposed a linear relationship stopping at a maximum (no emission controls, poor maintenance as observed in Bangkok and Katmandu in 1993 and Mexico City in 1991). The more recent data in Tables 1 and 2 confirm this result. We have also taken the data in Tables 1 and 2 and correlated on-road CO with on-road HC. The result is shown in Figure 3 where the slope is 0.3 and the correlation coefficient 0.49.

From Tables 1 and 2 several features stand out. Countries with low per capita income have higher emissions [18]. The highest HC emissions are dominated by large fractions of two-stroke engines. These engines produce HC/CO emission ratios which are much larger than even uncontrolled four-stroke engines. Countries with significant diesel fraction show $NO > 15$ g/kg. Overall there is a reasonable HC/CO correlation (Figure 3), not unexpected since both increase with increasing age and both increase absent emission controls.

Table 2 shows data from Mexico City in 1991 and 1994. Schifter et al has reported on-road emissions in 2000 [1]. Volkamer et al [2] report a rush hour CO/CO₂ ratio from which average

Table 1. FEAT data sets and mean emissions collected in the United States.

| Location & Year | Measurements | Mean gCO/kg | Mean gHC/kg | Mean gNO/kg | Mean Model Year |
|---------------------------|--------------|----------------|----------------|----------------|--------------------|
| Austin TX, 1998 | 17,265 | 70.2 | 13.2 | 4.1 | 1993.0 |
| Baltimore MD, 1992 | 4,761 | 61.4 | 4.4 | * | 1987.8 |
| Chicago IL, 1989 | 11,818 | 105 | * | * | 1983.5 |
| Chicago IL, 1990 | 13,639 | 125 | 49 | * | 1985.3 |
| Chicago IL, 1992 | 8,733 | 121 | 32.8 | * | 1986.0 |
| Chicago IL, 1997 | 19,682 | 56 | 5.3 | 5.5 | 1992.7 |
| Chicago IL, 1998 | 23,560 | 49 | 5.3 | 5.7 | 1993.6 |
| Chicago IL, 1999 | 23,088 | 44 | 4.5 | 5.3 | 1994.3 |
| Chicago IL, 2000 | 22,065 | 33 | 3.9 | 4.5 | 1994.9 |
| Chicago IL, 2002 | 22,320 | 29 | 3.2 | 3.7 | 1997.4 |
| Denver CO, 1989 | 4,909 | 92 | * | * | 1983.1 |
| Denver CO, 1991 | 13,391 | 89 | * | * | 1985.9 |
| Denver CO, 1992 | 40,019 | 84 | 17.4 | * | 1985.5 |
| Denver CO, 1994 | 2,787 | 69 | 6.0 | 6.8 | 1987.0 |
| Denver CO, 1995 | 3,176 | 64 | 5.6 | 10.7 | 1989.2 |
| Denver CO, 1996 | 30,675 | 66 | 9.5 | 11.8 | 1989.2 |
| Denver CO, 1997 | 46,120 | 61 | 10.1 | 8.2 | 1990.3 |
| Denver CO, 1997 | 39,152 | 77 | 9.8 | 7.2 | 1990.4 |
| Denver CO, 1997 | 33,561 | 85 | 8.3 | 5.6 | 1990.8 |
| Denver CO, 1999 | 26,709 | 56 | 5.0 | 8.4 | 1992.4 |
| Denver CO, 2000 | 22,986 | 54 | 4.6 | 7.2 | 1993.4 |
| Denver CO, 2001 | 21,021 | 43 | 4.6 | 6.8 | 1994.6 |
| Denver CO, 2002 | 10,025 | 33 | 2.6 | 5.7 | 1996.5 |
| Denver CO, 2003 | 21,321 | 44 | 3.4 | 6.5 | 1996.4 |
| El Paso TX, 1993 | 14,109 | 143 | 26 | * | 1986.1 |
| Glenwood Springs CO, 2001 | 627 | 44 | 7.9 | 9.9 | 1995.2 |
| Grand Junction CO, 2001 | 5,240 | 69 | 6.8 | 9.2 | 1993.6 |
| La Brea CA, 2001 | 20,319 | 56 | 4.6 | 5.6 | 1994.4 |
| La Brea CA, 2003 | 20,191 | 42 | 4.5 | 4.5 | 1996.5 |
| Los Angeles CA, 1989 | 16,511 | 141 | * | * | 1981.8 |
| Los Angeles CA, 1991 | 91,679 | 95 | 27.2 | * | 1984.7 |
| Los Angeles CA, 1999 | 12,655 | 66 | 8.0 | 6.1 | 1991.6 |
| Naperville IL, 1990 | 1,890 | 39 | * | * | 1986.3 |
| Nevada, 1994 | 20,747 | 93 | 12 | 18 | 1987.1 |
| Phoenix AZ, 1998 | 17,759 | 34 | 3.9 | 5.1 | 1993.3 |
| Phoenix AZ, 1999 | 18,894 | 38 | 3.0 | 8.1 | 1994.0 |
| Phoenix AZ, 2000 | 20,801 | 34 | 3.8 | 6.4 | 1995.3 |
| Phoenix AZ, 2002 | 23,679 | 27 | 2.6 | 4.6 | 1997.4 |
| Provo UT, 1992 | 17,442 | 119 | 57 | * | 1984.6 |
| Riverside CA, 1999 | 18,752 | 67 | 3.0 | 5.2 | 1992.4 |
| Riverside CA, 2000 | 23,303 | 62 | 2.6 | 6.0 | 1993.3 |
| Riverside CA, 2001 | 19,800 | 48 | 2.0 | 5.6 | 1994.5 |
| Sacramento CA, 1999 | 18,405 | 36 | 10.4 | 3.1 | 1992.9 |
| San Jose CA, 1999 | 37,335 | 49 | 6.1 | 4.4 | 1992.5 |
| Tucson AZ, 1994 | 14,051 | 121 | 27.6 | * | 1985.2 |
| Ute Pass CO, 1989 | 4,541 | 188 | * | * | 1982.3 |

Table 2. FEAT data sets and mean emissions collected worldwide.

| Locations & Year | Measurements | Mean gCO/kg | Mean gHC/kg | Mean gNO/kg | Mean Model Year |
|------------------------|--------------|----------------|----------------|----------------|--------------------|
| Bangkok THA, 1993 | 5,260 | 264 | 220 | * | * |
| Edinburgh SCT, 1993 | 1,681 | 172 | 20 | 48 | * |
| Hamburg DEU, 1994 | 11,128 | 69 | 14 | 18 | * |
| Hong Kong, 1993 | 5,891 | 115 | 20 | * | * |
| Kathmandu NPL, 1993 | 11,227 | 362 | 189 | * | * |
| Leicester UK, 1993 | 901 | 213 | 6.0 | 56 | * |
| Lisbon PRT, 1994 | 10,426 | 174 | 21.6 | 18 | * |
| London UK, 1993 | 4,149 | 105 | 14.2 | 34 | * |
| Lyon FRA, 1994 | 9,638 | 132 | 26 | 16 | 1989.1 |
| Kuala Lumpur MAL, 1995 | 9,478 | 209 | 22 | 31 | * |
| Mexico City MEX, 1991 | 31,838 | 465 | 64.3 | * | * |
| Mexico City MEX, 1994 | 39,273 | 234 | 32.5 | * | * |
| Milan ITA, 1994 | 13,546 | 157 | 22.8 | 17.4 | 1989.3 |
| Monterrey MEX, 1995 | 10,654 | 203 | 23.8 | 20 | 1987.8 |
| Rotterdam NLD, 1994 | 11,359 | 73 | 13.5 | 27 | 1989.2 |
| Seoul KOR, 1993 | 3,104 | 100 | 14.7 | * | * |
| Taipai TWN, 1993 | 12,062 | 180 | 23.4 | * | * |
| Toronto CAN, 1990 | 2,809 | 71 | * | * | 1986.2 |
| Tokyo JPN, 1995 | 3,881 | 67 | 7.6 | * | * |
| Zurich CHE, 1994 | 11,298 | 100 | 9.5 | * | * |

CO emissions can be determined. Figure 4 shows that all four of these data sets indicate a steadily reducing CO emission level, albeit remaining well above US levels.

We have shown recently that emissions of newer vehicles in the USA have decreased dramatically as a result of new vehicle emission standards and the manufacturer's ability to meet them with increasingly robust hardware [20]. As a result, most of the on-road emissions arises from a very few broken vehicles. We illustrate this with the most recent CRC data from California [21]. Figure 5 shows three sets of deciles in which vehicle emissions for the three pollutants CO, HC and NO are plotted in such a way that the heights of the bars represents the emissions which a fleet of ten vehicles would have to match the 2002 on-road statistics.

From these graphs it is apparent that a very few vehicles are causing most of the emissions. In fact for these data, 50% of the emissions of CO, HC and NO are caused by 4.4%, 7.4% and 7.4% of the measurements respectively. Because so few vehicles are responsible for most of the emissions and these vehicles are broken, it is apparent that further tightening of new car standards will do little to improve average on-road emissions, despite their considerable expense. It is also apparent from the same data that altering the fuel chemistry in such a way as to cause relatively small percent reduction in emissions of all vehicles is not at all a cost effective means of reducing on-road emissions. These conclusions were demonstrated quantitatively by Beaton et al in 1995 [4] and have been reinforced from an economics standpoint by Rask [22] and the more recent data makes the conclusion even stronger because the emissions distribution in the USA is even more skewed now than it was then. The conclusion, then as now, is that identification and repair (or scrappage if appropriate) of the

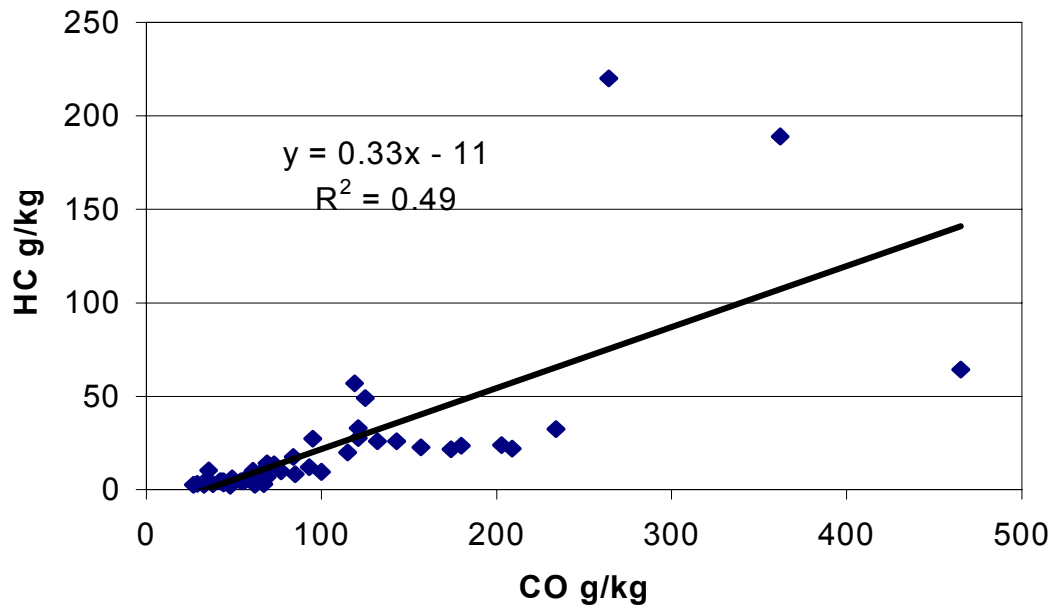


Figure 3. Correlation graph of HC versus CO for data sets in Tables 1 and 2 with more than 5000 measurements.

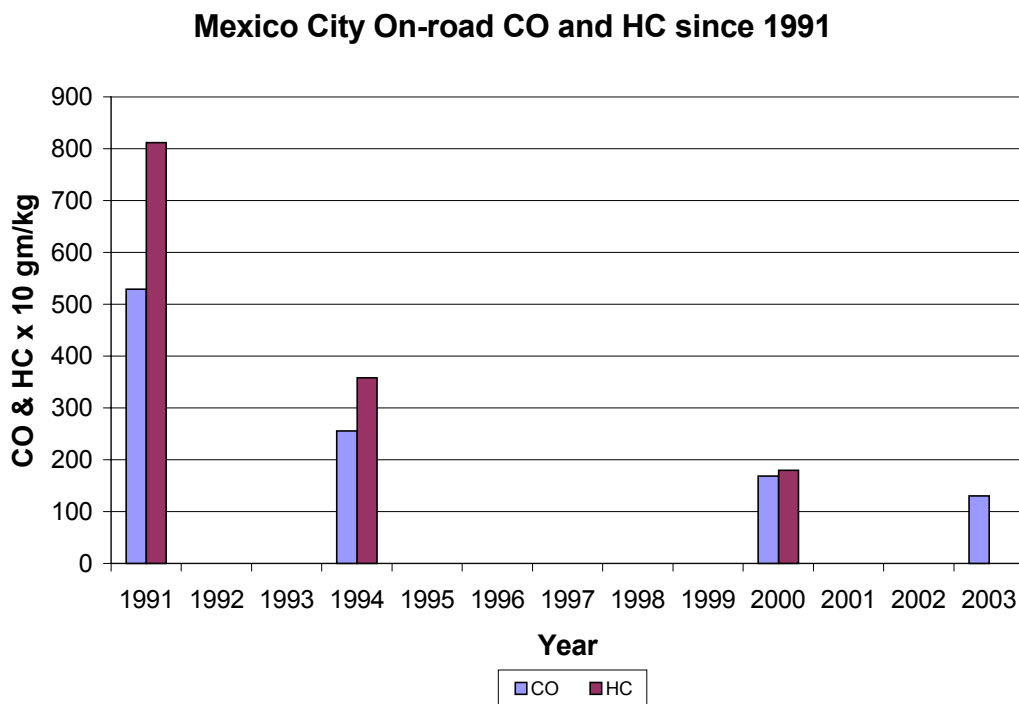


Figure 4. CO and HC emissions collected in Mexico city by different researchers. HC emissions are multiplied by 10 relative to CO.

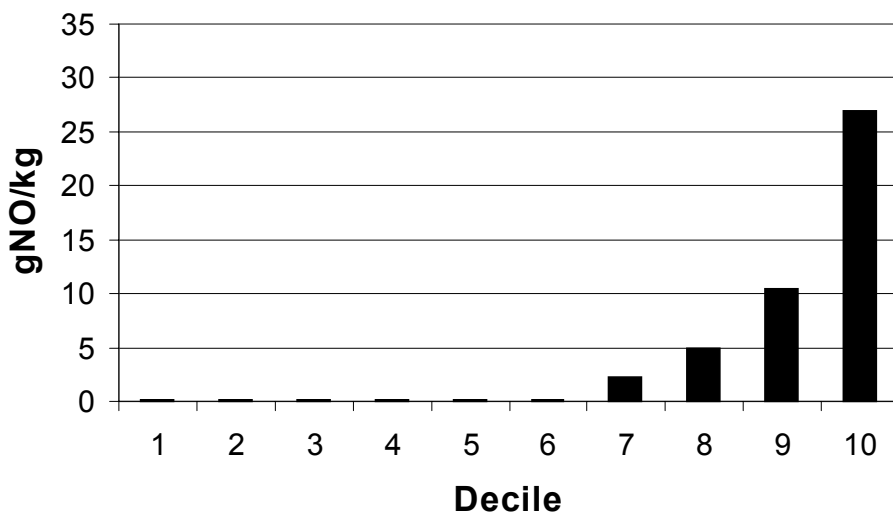
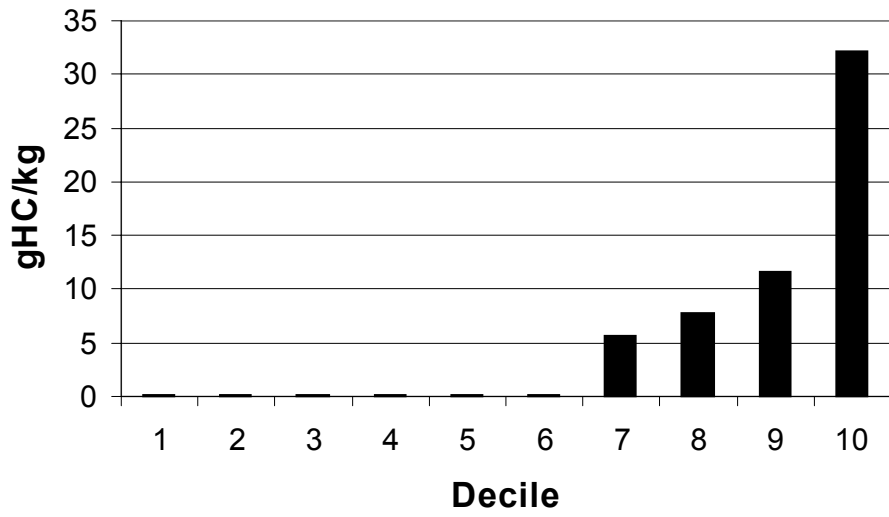
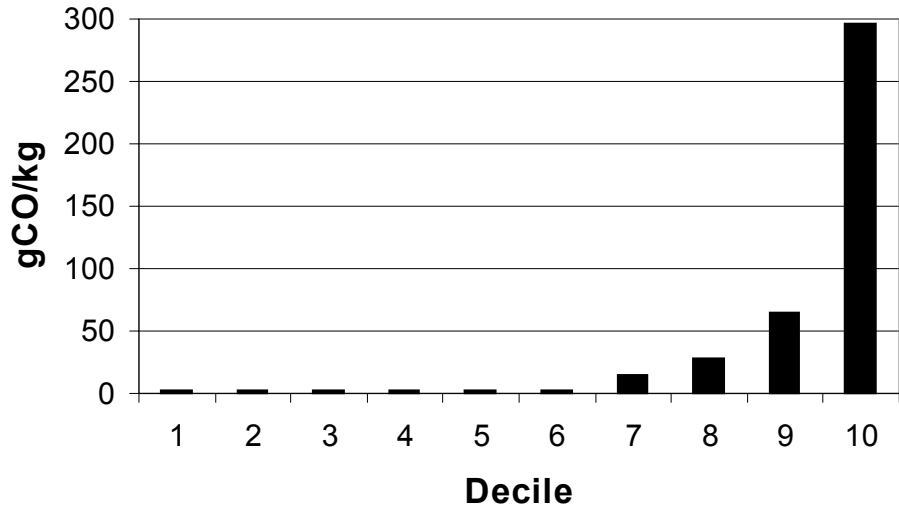


Figure 5. Emissions by decile for on-road emissions collected in Los Angeles CA, October 2003.

on-road gross emitters, is the most effective strategy, and that current Inspection and Maintenance programs are not as successful at achieving this goal as they are supposed to be [23,24].

REFERENCES

1. I. Schifter, L. Diaz, J. Duran, E. Guzman, O. Chavez and E. Lopez-Salinas, *Environ. Sci. Technol.*, **37**, 395-401, 2003.
2. R. Volkamer, J. Samuelson, J. Mellqvist, B. Galle, E. Flores-Jardines, M. Grutter, L. Molina and M. Molina, *Open-path DOAS and FTIR Measurements in Mexico City*, presented at the University of Denver, Denver CO., May 2004.
3. Y. Zhang, G.A. Bishop and D.H. Stedman, *Environ. Sci. Technol.*, **28**, 1370-1374, 1993.
4. S.P. Beaton, G.A. Bishop, Y. Zhang, L.L. Ashbaugh, D.R. Lawson and D.H. Stedman, *Science*, **268**, 991-993, 1995.
5. G.A. Bishop and D.H. Stedman, *Acc. Chem. Res.*, **29**, 489-495, 1996.
6. P.J. Popp, G.A. Bishop and D.H. Stedman, *J. Air & Waste Manage. Assoc.*, **49**, 1463-1468, 1999.
7. B.C. Singer, R.A. Harley, D. Littlejohn, J. Ho and T. Vo, *Environ. Sci. Technol.*, **27**, 3241, 1998.
8. D.R. Lawson, P.J. Groblicki, D.H. Stedman, G.A. Bishop and P.L. Guenther, *J. Air & Waste Manage. Assoc.*, **40**, 1096, 1990.
9. L.L. Ashbaugh, D.R. Lawson, G.A. Bishop, P.L. Guenther, D.H. Stedman, R.D. Stephens, P.J. Groblicki, J.S. Parikh, B.J. Johnson and S.C. Haung, In *PM10 Standards and Nontraditional Particulate Source Controls*; J.C. Chow and D.M. Ono, Eds.; Air & Waste Manage. Assoc., Pittsburgh PA., 1992; Vol. II, pp. 720-739.
10. J.L. Jimenez, P. McClintock, G.J. McRae, D.D. Nelson and M.S. Zahniser, *Vehicle Specific Power: A Useful Parameter for Remote Sensing and Emission Studies*, Proceedings of the 9th CRC On-Road Vehicle Emissions Workshop, San Diego CA., April 1999.
11. A. Sjödin, *J. Air & Waste Manage. Assoc.*, **44**, 397-404, 1994.
12. D.H. Stedman, *Playing with fire: Science and Politics of Air Pollution from Cars*, University Lecture, presented at the University of Denver, 1995, http://www.feat.biochem.du.edu/assets/reports/Univ_Lecture/index.html.
13. P.J. Popp, S.S. Pokharel, G.A. Bishop and D.H. Stedman, *On-Road Remote Sensing of Automobile Emissions in the Denver Area: Year 1*, final report to the Coordinating

Research Council, Dec. 1999,
http://www.feat.biochem.du.edu/assets/databases/Colorado/6th_I25/Denver_Year_1_CRC99.pdf.

14. Private communication from Dr. Ian McRae, TRL, UK, Feb., 2004.
15. A. Sjodin and K. Andréasson *Atmos. Environ.*, **34**, 4657-4665, 2000. and private communication, Feb. 2004.
16. B.C. Singer and R.A. Harley, *Atmos. Environ.*, **34**, 1783-1795, 2000.
17. S.S. Pokharel, G.A. Bishop and D.H. Stedman, *Atmos. Environ.*, **36**, 5177-5184, 2002.
18. K.S. Bradley, D.H. Stedman and G.A. Bishop, *Chemosphere Global Change Sci.*, **1**, 65-72, 1999.
19. G.A. Bishop, D.H. Stedman, J. de la Garza Castro and F.J. Dávalos, *Environ. Sci. Technol.*, **31**, 3505-3510, 1997.
20. S.S. Pokharel, G.A. Bishop, D.H. Stedman and R. Slott, *Environ. Sci. Technol.*, **37**, 5097-5101, 2003.
21. G.A. Bishop, D.A. Burgard and D.H. Stedman, *On-Road Remote Sensing of Automobile Emissions in the La Brea Area: Year 3, October 2003*, final report to the Coordinating Research Council, May 2004,
http://www.feat.biochem.du.edu/assets/databases/Cal/La_Brea_Year_3_CRC_2003.pdf.
22. Rask, K. *Clean air policy and oxygenated fuels: do we get what we pay for?*, *Energy Economics*, **26**, 161-177, 2004.
23. D.H. Stedman, G.A. Bishop, P. Aldrete and R.S. Slott, *Environ. Sci. Technol.*, **31**, 927-931, 1997.
24. D.H. Stedman, G.A. Bishop and R.S. Slott, *Environ. Sci. Technol.*, **32**, 1544-1545, 1998.